


4 ports Gigabit Ethernet switch is an unmanaged Ethernet switch, which provides 2 optical, 2 Ethernet uplink ports and 4 Gigabit downlink Ethernet ports, wherein 1 optical and 1 Ethernet port are Combo ports. The product could satisfy 32-channel IPC small convergence system application and is widely used in security network video surveillance, network engineering and other occasions.

4 ports Gigabit Ethernet PoE/HPOE switch is an unmanaged PoE Ethernet switch, which provides 2 optical, 2 Ethernet uplink ports and 4 Gigabit PoE downlink Ethernet ports, wherein 1 optical and 1 Ethernet ports are Combo ports. The product supports PoE+/PoE++ high power network Dome. which could be widely used in security network video surveillance, network engineering and other occasions.

Application

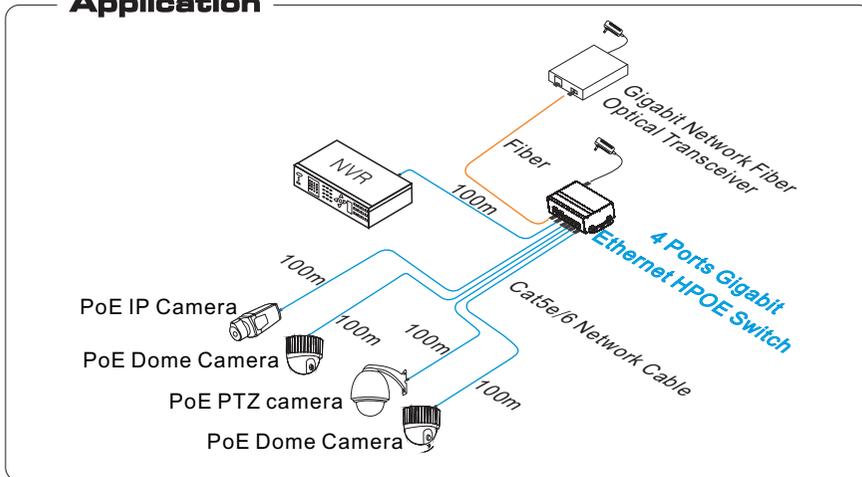


Feature

- Standard: IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3af/at;
- Provide 2 optical and 2 Ethernet uplink ports, wherein 1 optical port and 1 Ethernet port are Combo ports;
- Provide 4x10/100/1000 Mbps adaptive downlink ports, 1~4 ports of PoE switch support IEEE802.3af/at;
- Support port(Auto MDI/MDIX)function;
- Standard DC port and green terminal port, support power adapter with different connectors and power;
- Redundant power design, support power hot backup;
- Fanless wavy metal shell with heat dissipation design ;
- Fast installation and easy operation, convenient for wall, din rail and desktop installation.

Caution

- 1) Transmission distance is related to the connecting cable. We suggest to use standard Cat5e/6 network cable to get the farthest transmission distance.
- 2) If using optical port, customer need to purchase SFP module additional;
- 3) The equipment must connect anti-thunder ground, otherwise equipment will greatly reducing protection level; please use 20th or over wire to connect grounding terminal to the ground.

Board diagram

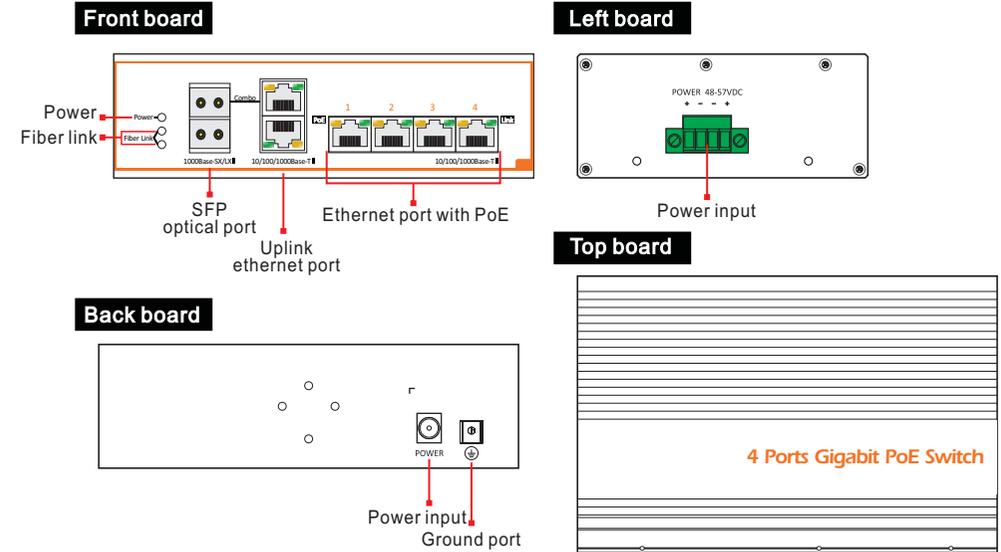

Installation steps

Please check the following items before installation. If any missing, please contact the dealer.

- | | |
|--------------------|------|
| ● Equipment | 1pc |
| ● Power adapter | 1pc |
| ● Hanger | 2pcs |
| ● Din rails hanger | 1pc |
| ● User manual | 1pc |

Please follow the following installation steps

- 1) Please turn off the signal source and the device's power, installation with power on may damage the device;
- 2) Use 4 network cables to connect 4 IP cameras and 1~4 RJ45 ports of switch;
- 3) Use another network cable (or optical fiber) to connect switch's uplink port with NVR or computer, etc.;
- 4) Connect equipment with power adapter;
- 5) Check if the installation is correct and device is good, make sure all the connection is reliable and power up the system;
- 6) Make sure every network device has power supply and work normally.

Specification

Item		4 Ports Gigabit Ethernet HPoE Switch
Power	Power supply	power adapter
	Voltage range	DC48V~57V
	Consumption	60W
Network port parameters	Ethernet port	Combo port, SFP optical port:1000Mbps Other optical port:10/100/1000Mbps
	Transmission distance	Ethernet port:100m; SFP optical port: depend on the optical module
	transmission medium	Cat5e/6 standard network cable
	PoE agreement	IEEE802.3af, IEEE802.3at agreement
	PoE power supply	4 pairs wire
	PoE power	Single port≤60W
Network exchange specification	Network standard	IEEE802.3 ,IEEE802.3u ,IEEE802.3ab ,IEEE802.3z
	Exchange way	Store and forward
	Package data cache	1M
	MAC address list	8K
Status indicator	Power indicator	1 indicate power (Red)
	Optical port LED indicator	2 Fiber Link Green lights indicate fiber working status
	Uplink Ethernet port LED indicator	RJ45 port indicates network working status
Protection level	Downlink Ethernet port LED indicator	1~4 ports with green lights indicate network status, yellow light indicates PoE
	Communication port Lightning protection	Grade 3, Standard:IEC61000-4-5
Environmental	ESD	Grade 3, Standard:IEC61000-4-2
	Working temperature	-40℃~75℃
	Storage temperature	-40℃~85℃
Mechanical	Humidity (non-condensing)	0~95%
	Dimension (L×W×H)	110mm×163mm×46mm
	Material	Aluminum
	Color	Gray
	Weight	530g

Products are subject to change without prior notice

Trouble Shooting

Please find the following solution when the device doesn't work

- Please confirm if the installation is correct;
- Please confirm if the RJ45 cable order is in accordance with the EIA/TIA568A or 568B industry standards;
- The maximum consumption of each PoE port that supply for the PoE equipment can't exceed 60W, please do not use the PoE device whose consumption is over 60W;
- Please replace a failure device with a normal one to check if the device is broken;
- If the problem still exist, please contact the factory.

RJ 45 Making Method

Instruments to be used: wire crimper, network tester. Wire sequence of RJ45 plug should conform with EIA/TIA568A or 568B.

- 1) Shuck off about 2cm long the insulating layer, and bar the 4 pairs UTP cable;
- 2) Depart the 4 pairs UTP cable and straighten them;
- 3) Line up the 8 pieces of cables per EIA/TIA 568A or 568B;
- 4) Cut out 1.5 cm cable wrap and leave the bare wire;
- 5) Plug 8 cables into RJ45 plug, make sure each cable is in each pin;
- 6) Then use wire crimper to crimp it;
- 7) Follow the 5 steps above to make the another end, following the same sequence of the first plug;
- 8) Using network tester to test the cable whether is working.

pin	color
1	white/green
2	green
3	white/orange
4	blue
5	white/blue
6	orange
7	white/brown
8	brown



EIA/TIA 568A

pin	color
1	white/orange
2	orange
3	white/green
4	blue
5	white/blue
6	green
7	white/brown
8	brown



EIA/TIA 568B



Caution

- When choose RJ-45 make sure if one end is EIA/TIA568A, the other end should also be EIA/TIA568A.
- When choose RJ-45 make sure if one end is EIA/TIA568B, the other end should also be EIA/TIA568B.